

Docking Station

Aisino ASDA751


Pogo Pin Connector, for Charging A75 Pro

Expandable Interface with Ethernet, USB, RS232 Ports


Supports PINPad, Handheld Scanners



Power Supply

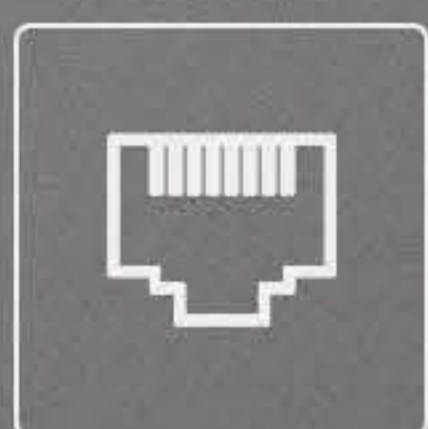


Ethernet

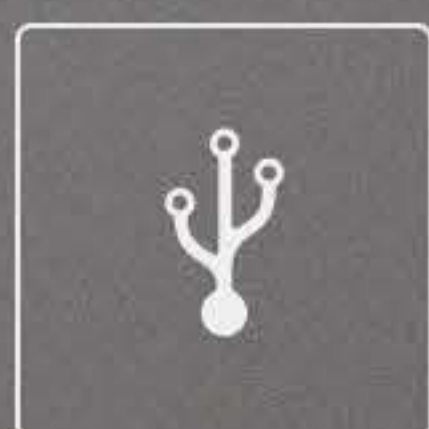

USB



RS232

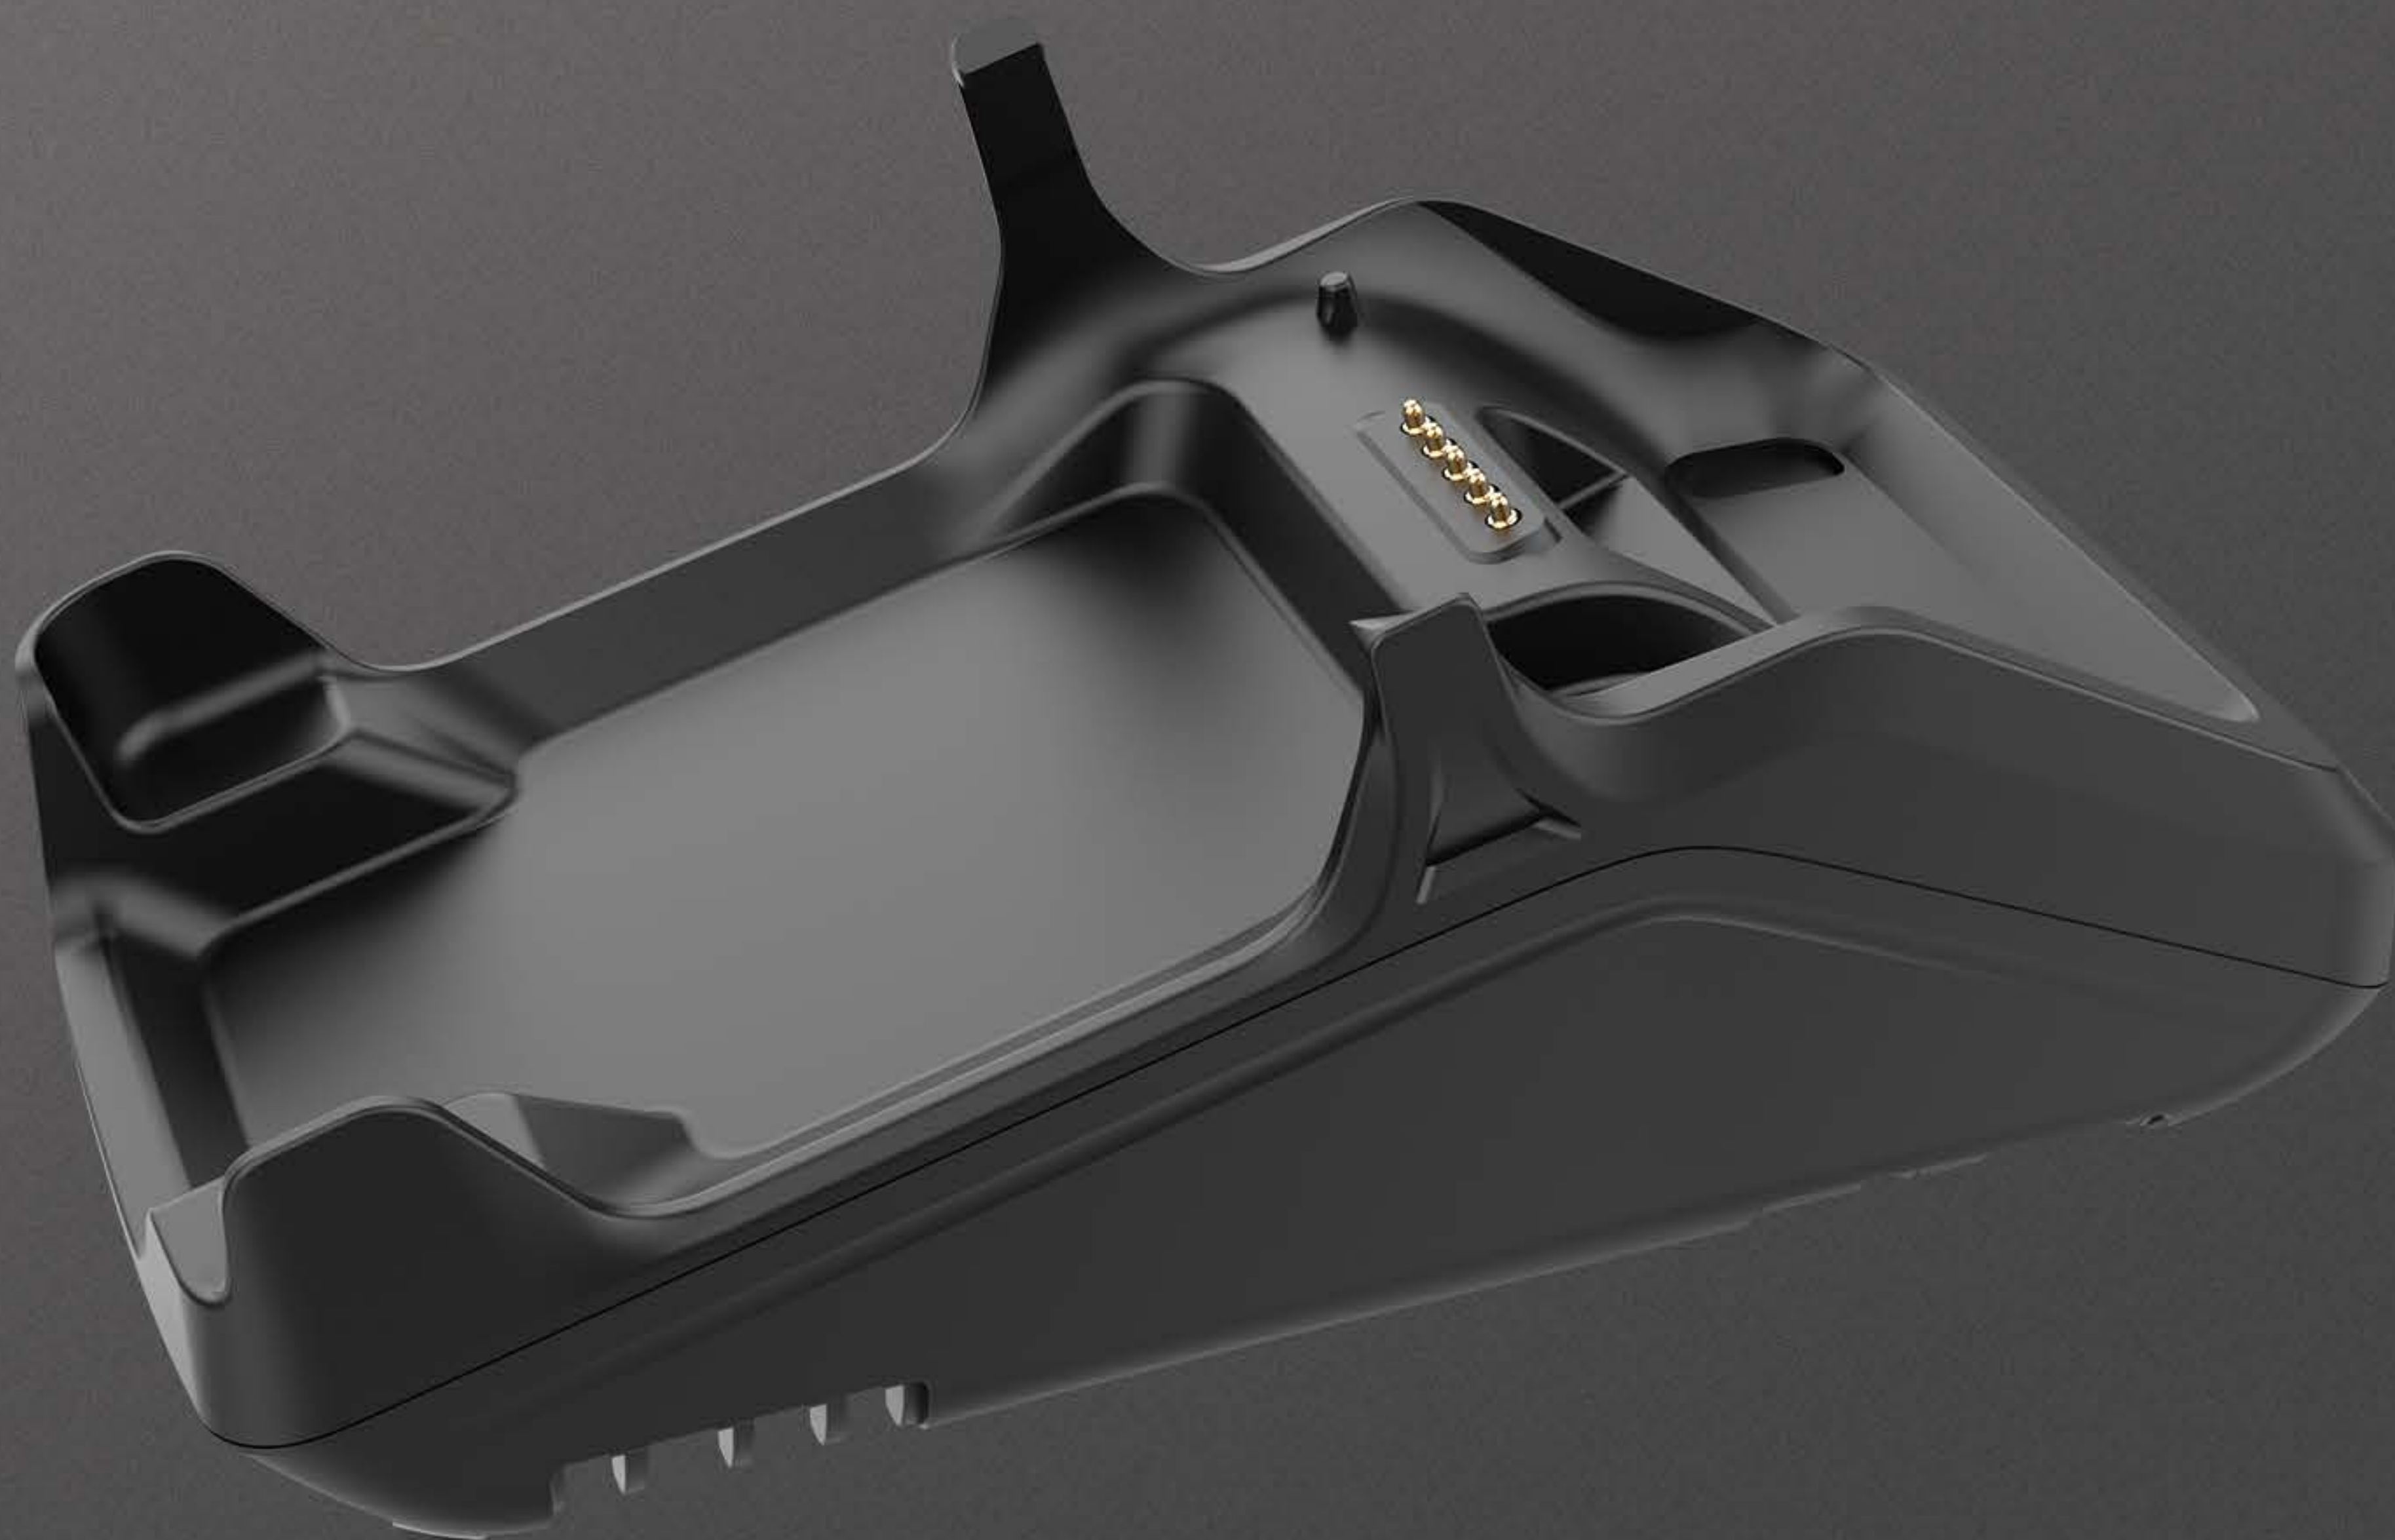

Aisino ASDA751

Specifications



Connections

Pogo Pin
Power Supply



Peripheral Ports

1 * Ethernet Port
1 (Optional 2) * USB Type-A
1 * USB Type-C for Charging
1 * RS232 Port
1 * PINPad Port



Indicator Lights

1 * Power Indicator
1 * Ethernet Indicator



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/2A



Anti-Static

±8KV Contact Discharge
±15KV Air Discharge



Environmental

Operating Temperature: -10°C ~ 50°C
Storage Temperature: -20°C ~ 70°C
Relative Humidity: 5%~95%, Non-condensing



Dimensions

190×91×83mm
L×W×H



Weight

130g

