


Multi-featured Docking Station

Aisino ASDV661


Pogo Pin Connector, for Charging V66 & Data Communication

Supports High-speed Printing


Expandable Interface with RS232, PINPad, USB, Ethernet Port

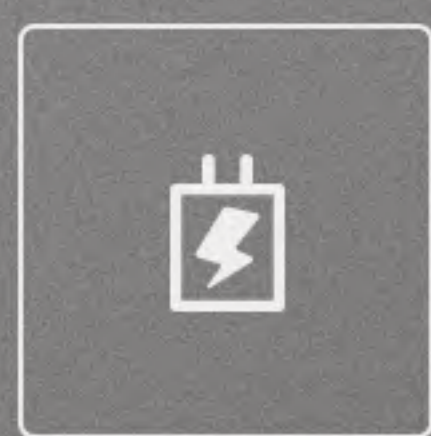


Power Supply

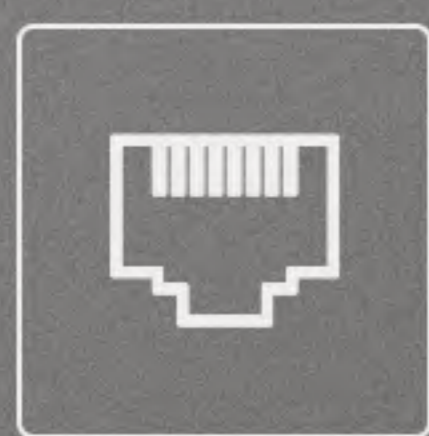


Ethernet

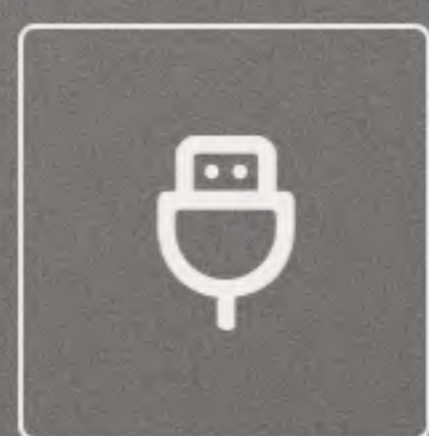

RS232

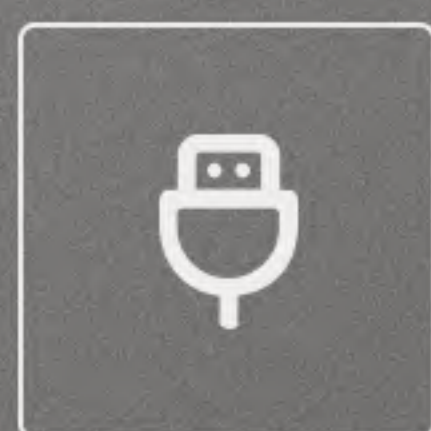

LAN

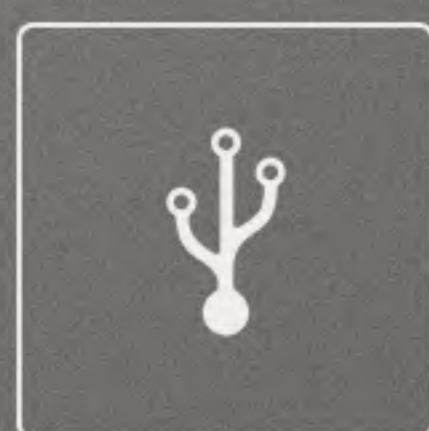

USB



Thermal Printer



Aisino ASDV661

Specifications



Connections

Pogo Pin,
Power Supply and Communications



Power Supply

Input: 100V-240V 50/60Hz
Output: 9V/2A



Anti-Static

±8KV Contact Discharge
±15KV Air Discharge



Dimensions

192×87×65.5mm
L×W×H



Weight

230g



Environmental

Operating Temperature: -10°C ~ 50°C
Storage Temperature: -20°C ~ 70°C
Relative Humidity: 5%~90%, Non-condensing



Printer

Thermal Printer
Paper Width: 58mm
Diameter: 40mm



Indicator Lights

1 * Power Indicator
1 * Ethernet Indicator
1 * Out-of-paper Indicator



Peripheral Ports

1 * DC Power Port
1 * RJ45 RS232
1 * RJ45 PINPad
1 * USB Type-A
1 * LAN

