

Docking Station

Aisino ASDA751

Pogo Pin Connector, for Charging & Communicating

Expandable Interface with Ethernet, USB, RS232 Ports


Supports PINPad, Handheld Scanners



Power Supply




Ethernet

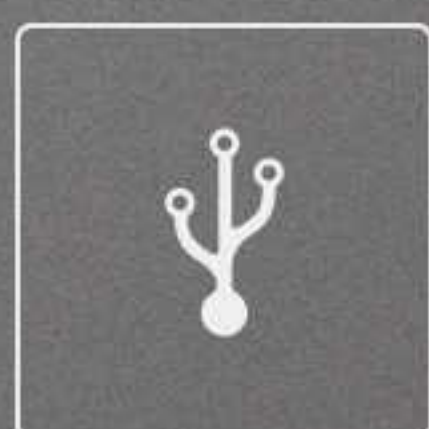

USB



RS232

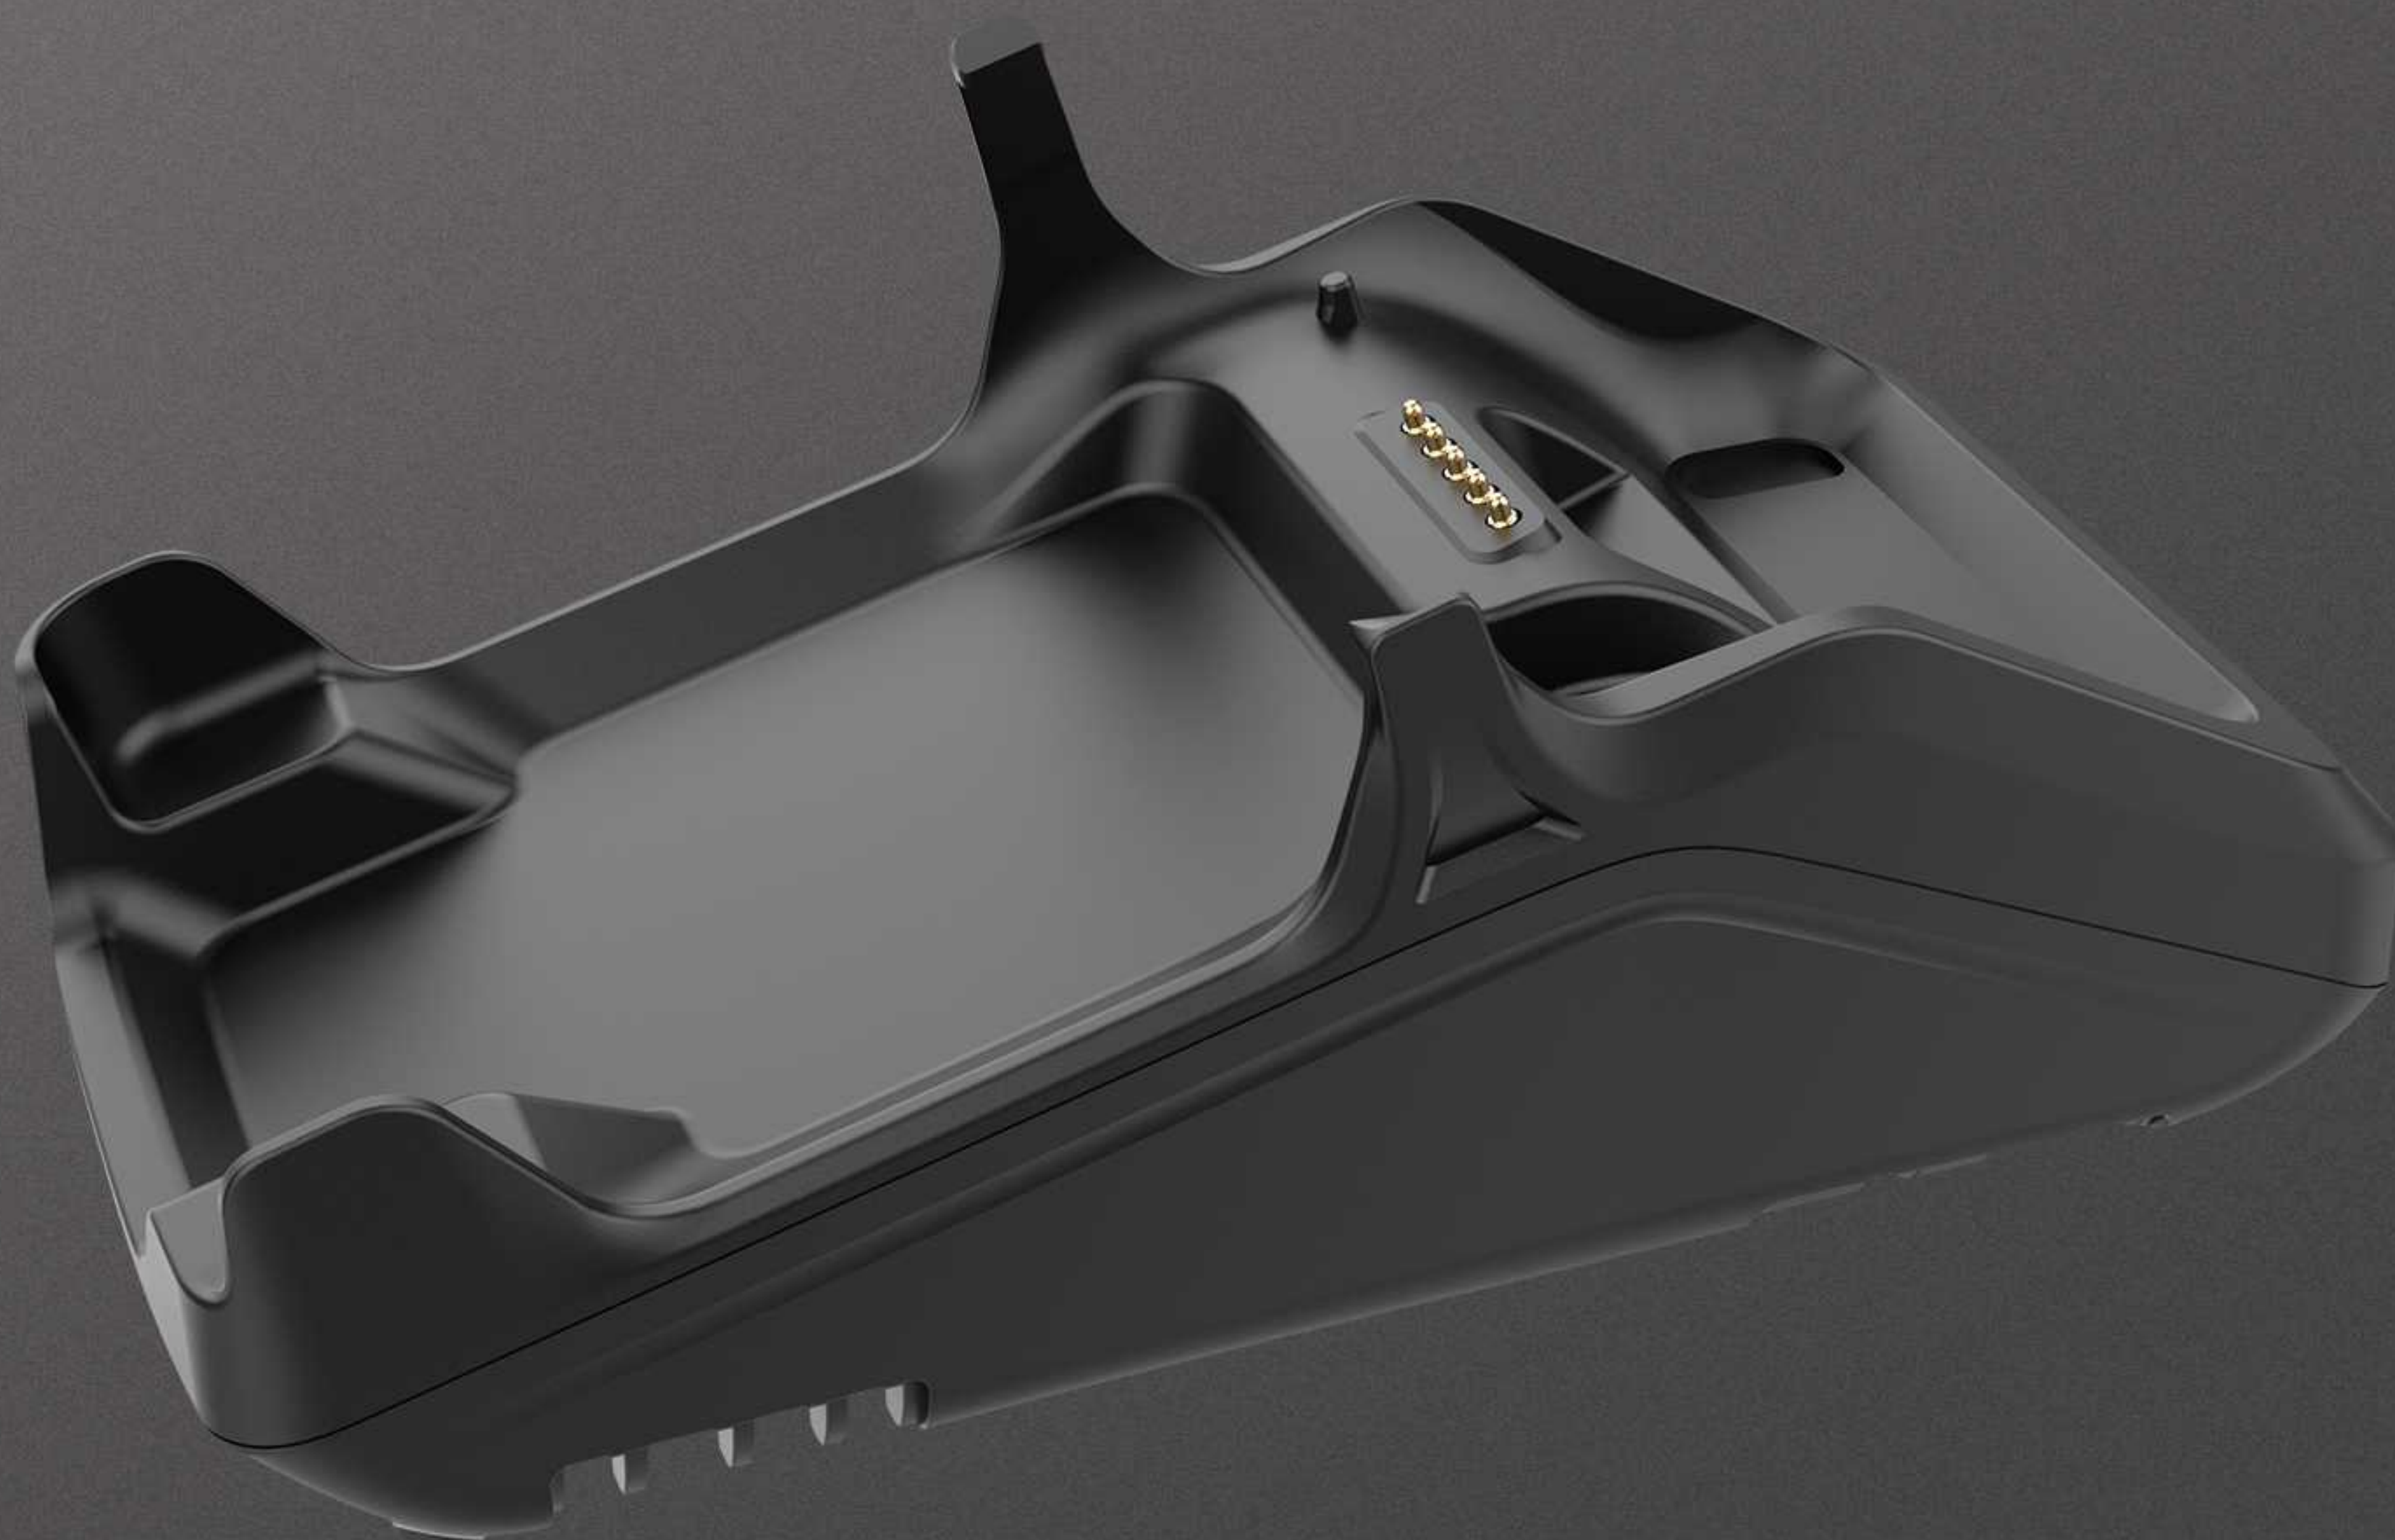

Aisino ASDA751

Specifications



Connections

Pogo Pin
Power Supply and Communications



Peripheral Ports

1 * Ethernet Port
2 * USB Type-A
1 * USB Type-C for Charging
1 * RS232 Port (Optional)
1 * PINPad Port (Optional)



Indicator Lights

1 * Power Indicator
1 * Ethernet Indicator



Power Supply

Input: 100V-240V 50/60Hz
Output: 5V/2A



Anti-Static

±8KV Contact Discharge
±15KV Air Discharge



Communication

Pogo Pin Connector
(Between A75/A75 Pro and the Docking Station)



Dimensions

190×91×83mm
L×W×H




Weight

130g



Environmental

Operating Temperature: -10°C ~ 50°C
Storage Temperature: -20°C ~ 70°C
Relative Humidity: 5%~95%, Non-condensing

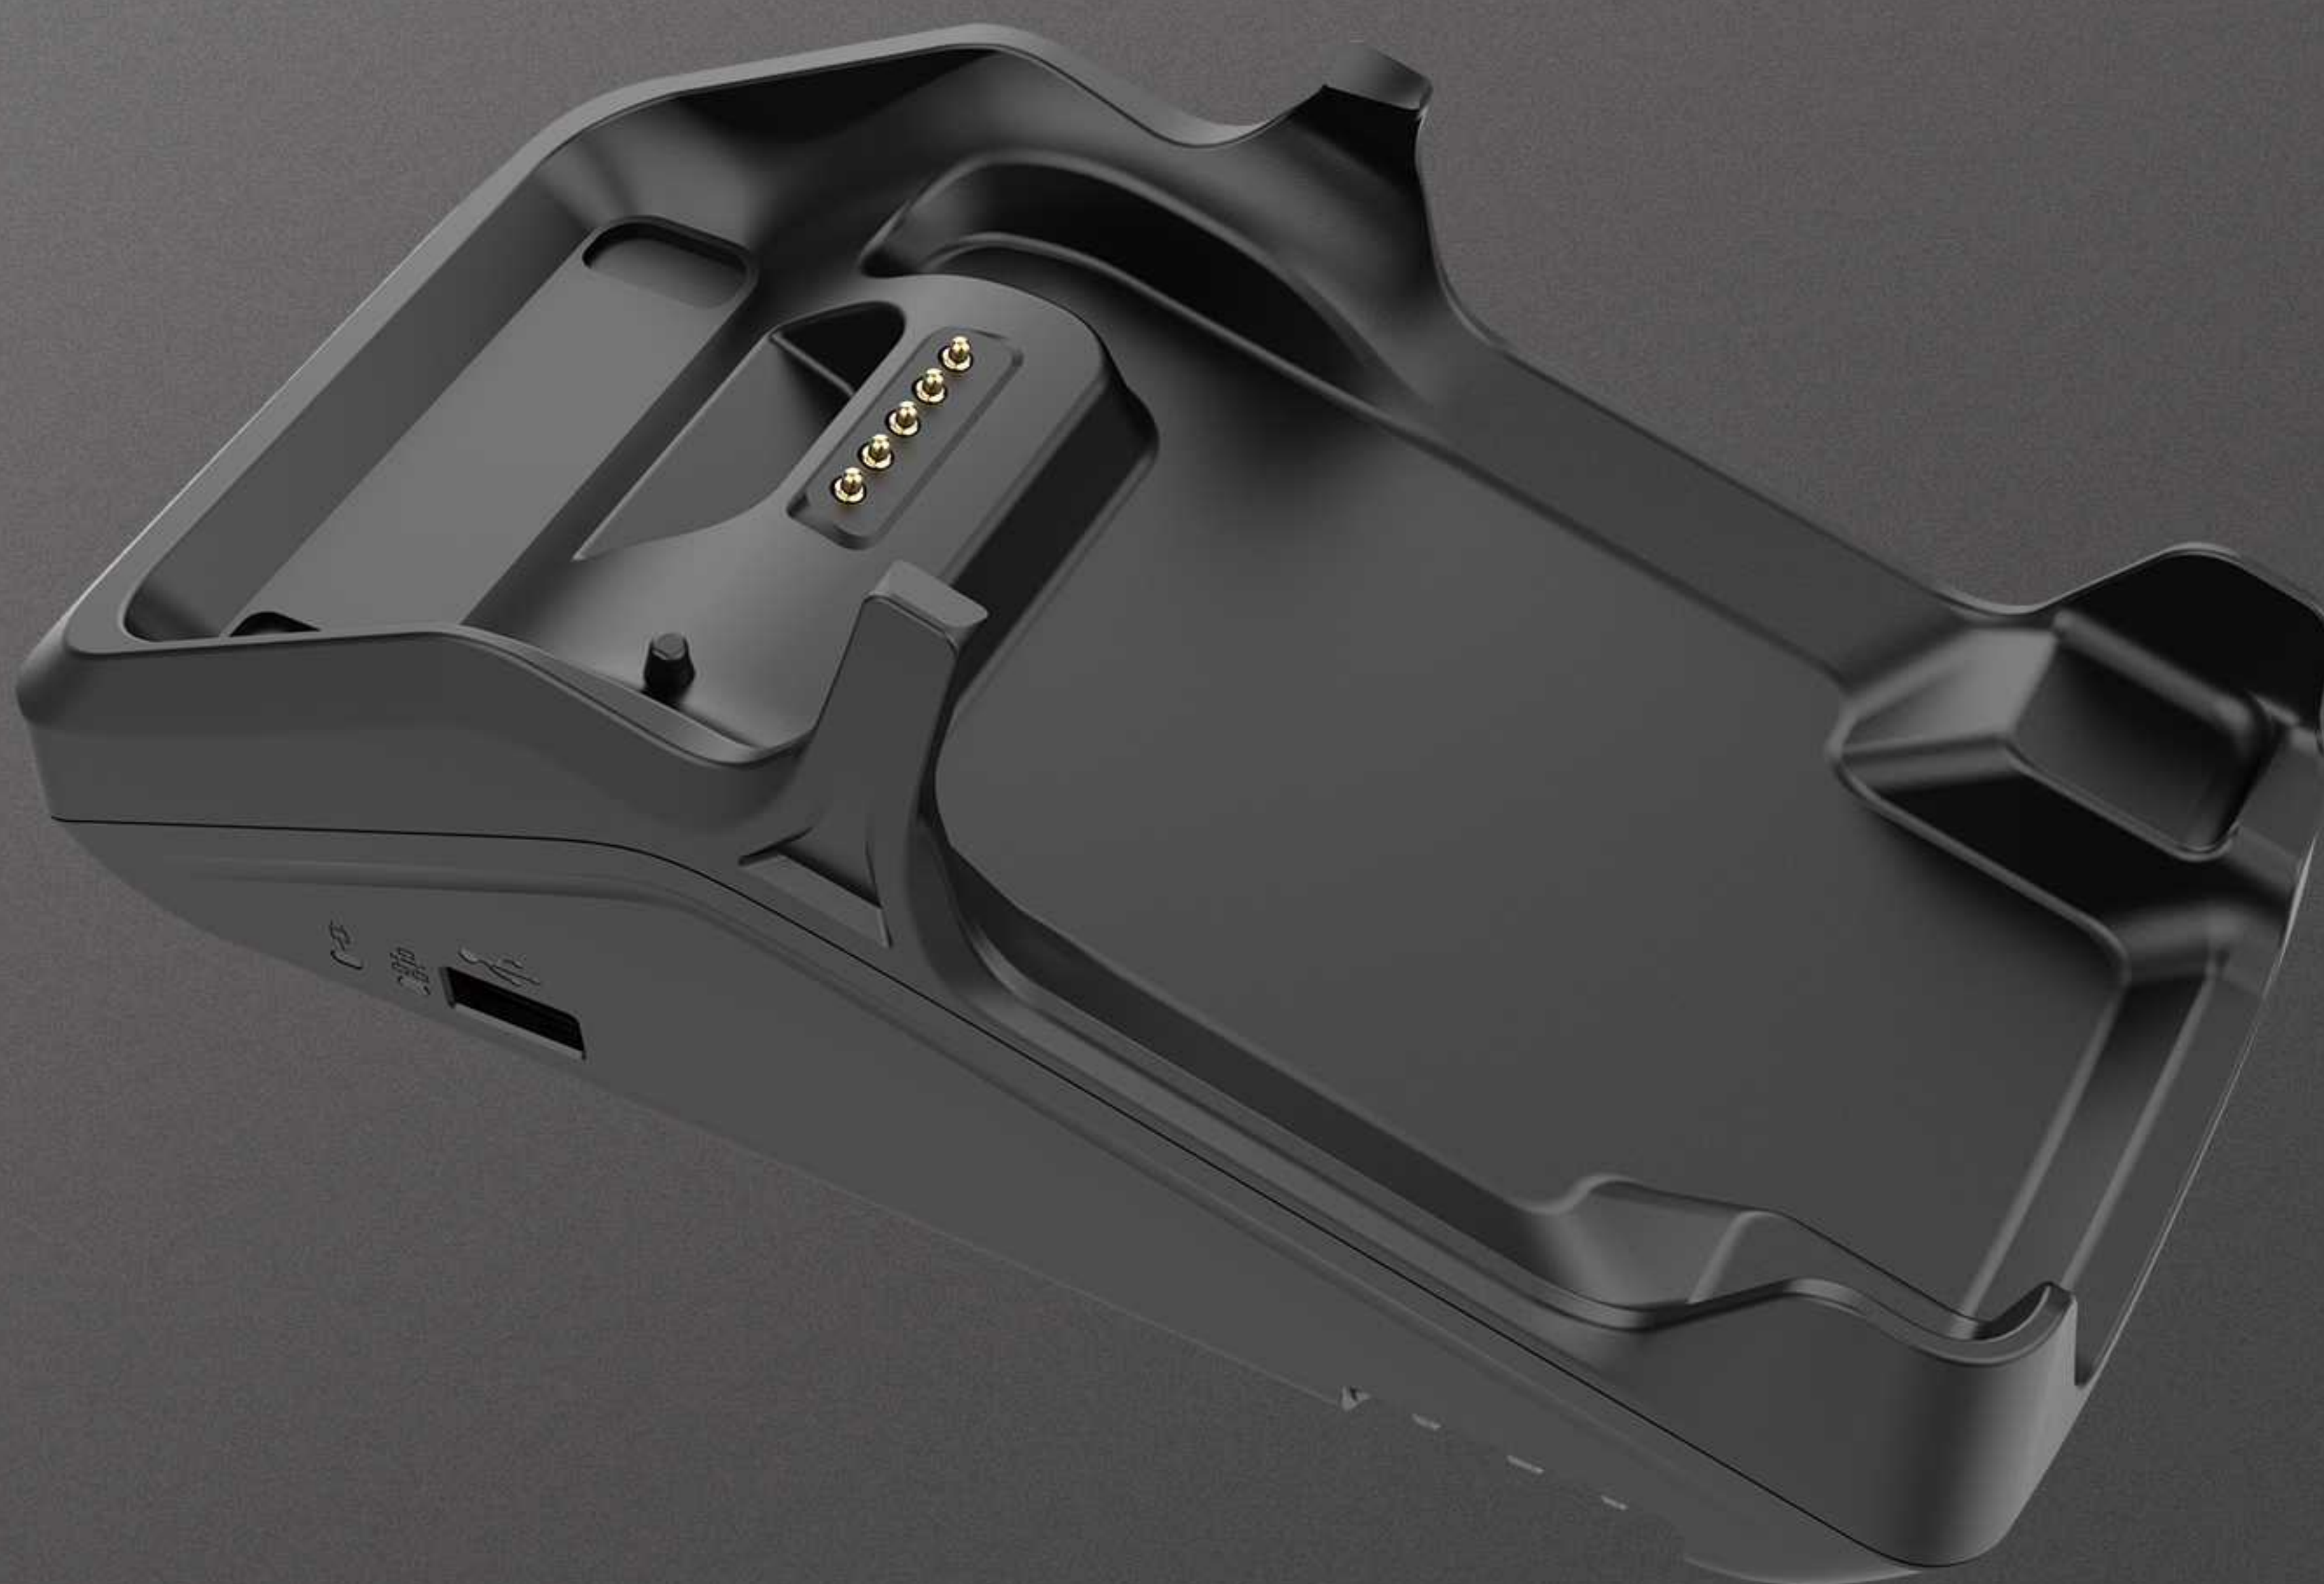

Note: This document is provided to you for informational purposes only and any changes may be made without prior notifications.